


General Design Features

- Designed for High Pressure Applications Requiring an Easy Maintenance, Collapse Resistant Screen
- In-Line Cleanout Access
- Pressures to 3000 psi
- 1/2"-2" FNPT
- Replaceable Stainless Steel Screen
- Operating Temperatures to 400 °F



Model Number & Dimension Data

Model	Inlet/Outlet	Max Pressure (psig)	Dimension (in.)		Clean Out Plug (in.)	Weight (lbs.)
			A	B		
YTS1	1/2 FNPT	3000	5-1/8	4	1/4	6
YTS3	3/4 FNPT	3000	5-1/8	4	1/4	6
YTS5	1 FNPT	3000	5-1/8	4	1/4	6
YTS8	1-1/2 FNPT	3000	7-1/2	5-3/8	3/4	17
YTS10	2 FNPT	3000	9-5/8	6-3/8	3/4	30

Parts List


Index	Description	Material Code
		0
1	Body	SA-487 GR 4A
2	Screen	304SS
3	Cap	CS
4	O-Ring	Viton®
5	Plug	316SS

Screen Data


Screen	Mesh	Inches	Microns
X	10	.067	1690
A	20	.033	840
B	40	.014	355
C	100	.006	149

Part Number

Codes

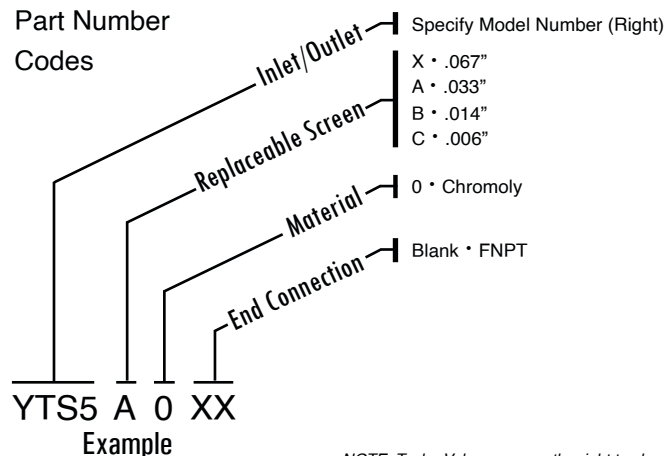

NOTE: Taylor Valve reserves the right to change product designs and specifications without notice.

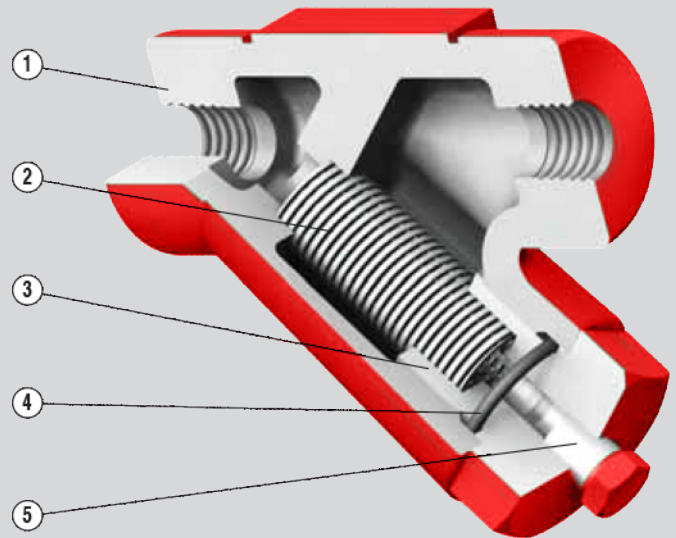

Taylor Valve Technology
 8300 S.W. 8th Street
 Oklahoma City, Oklahoma 73128
 TEL 405.787.0145
 FAX 800.805.3401
 WEB taylorvalve.com
 INFO info@taylorvalve.com