



Precise.

Quality.

Reliable.



RB SERIES CONTROL VALVES

FEATURES & *Benefits*

The RB Series Control Valve features several unique design characteristics that minimize wear and maximize service life.

The nozzle and external sleeve trim is designed to contain turbulence and wear by managing the flow into the nozzle and centralizing it into bore causing the flow streams to impinge on each other. The valve body and outlet are protected from wear because the energy conversion as a result of the pressure drop is concentrated in the trim cavity before flow enters the outlet. This eliminates the typical wear problems in the valve outlet.

The Upstream and Downstream balanced sleeve design greatly reduces the breakaway and closing thrust requirements to lift the sleeve on and off seat as well as during stem travel making the control stable and precise yielding better accuracy and repeatability.


- Accurate Control - Multi-Orifice Nozzle design provides precise control over a wide range of flows.
- Bolted Bonnet - A bolted bonnet prevents corrosion, cross-threading and galling of large threaded connections. The design allows for simple assembly and disassembly.
- Extended Mean Time Between Service - Robust design, application of hardened materials, and efficient flow geometry results in maximum production potential and minimum service requirements.
- Easy Maintenance - All Control Choke Valves are designed with special actuator mounting systems so the choke can be maintained without disassembly of the actuator and components or instrument connections.
- High Turndown Ratio - Clean flow geometry, high capacity and accurate control means the valve is suitable for both start-up and end-of field-life-process scenarios. In short, our control choke valves offer a one-valve solution for the full process life.
- Optional Features - Control Valves can have trims and actuators custom designed for specific requirements. Such as special noise reduction trims, reduced port and maximum orifice trims for very high pressure or minimum pressure loss for a declining field.


Applications:

- Well Site Automated and Manual Application
- Water Injection Control Valve
- CO2 Injection Control Valve
- High Pressure Drop Applications
- Gas Lift Injection Control

Hammer Union Options:

- Available in 2" & 3" Hammer Union Bonnet Connection
- For ease of assembly & dis-assembly of the choke
- Saves time & maintenance downtime
- Robust design for even higher pressure drop applications
- Minimum tools required for any repair/maintenance jobs

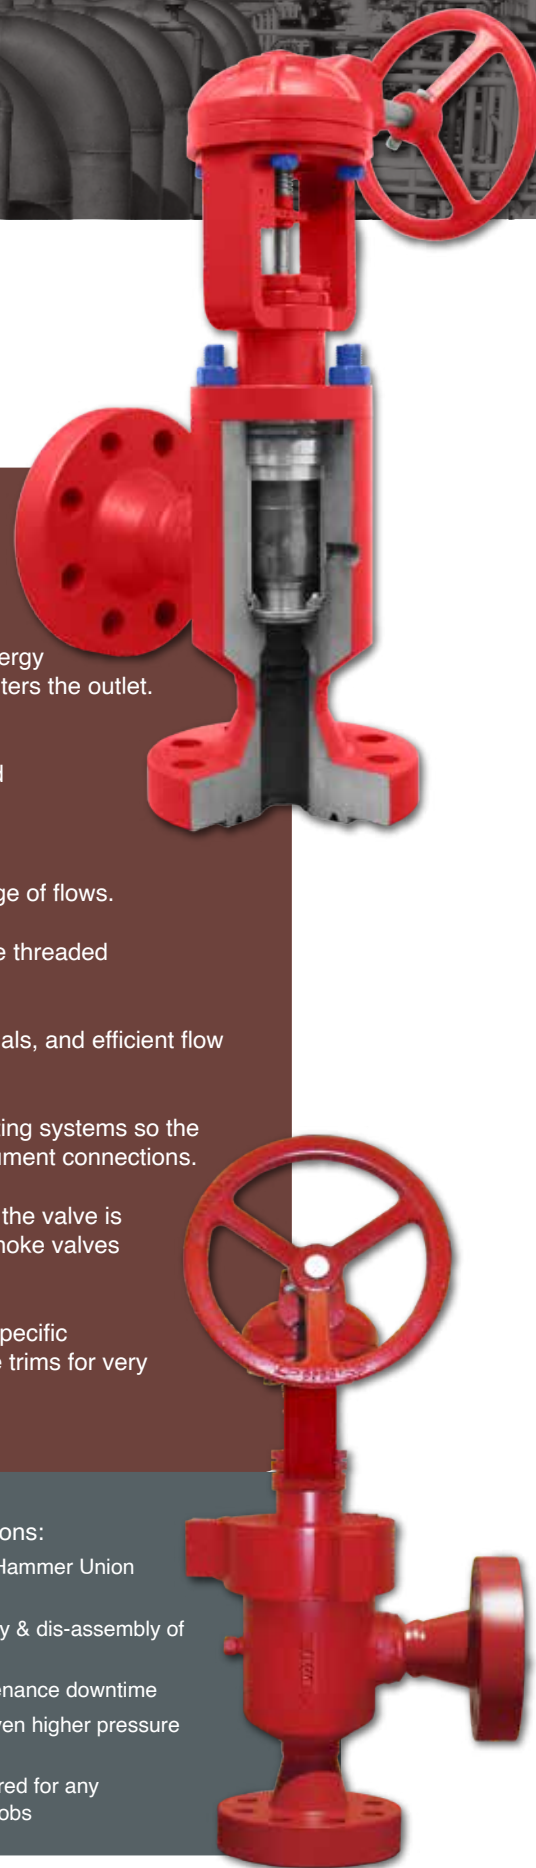

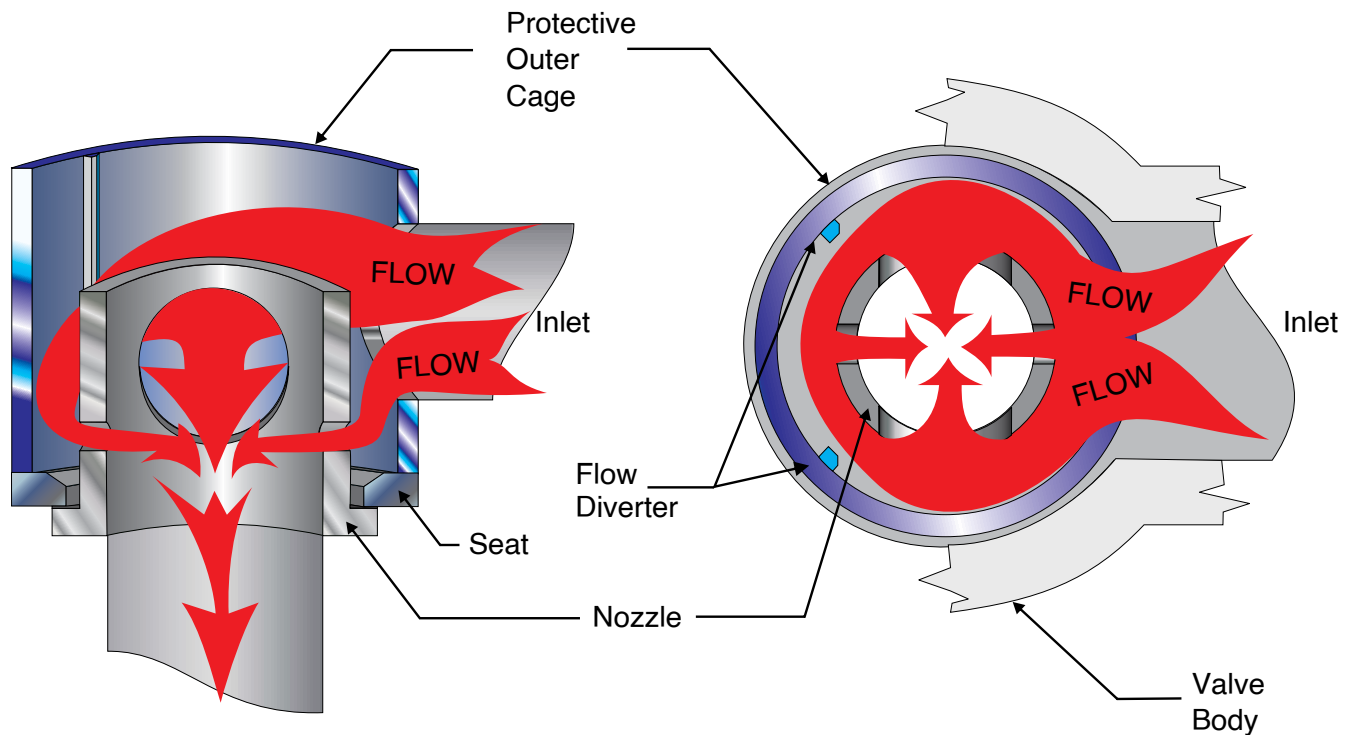

Side view of the fluid
flow through the valve

Flow converging in the
center of the nozzle


When the valve is open and flow enters through the inlet of the valve into the protective cage, it is circulated around the annulus created by the cage, nozzle and sleeve assembly. The symmetry of the ports in the nozzle cause the high velocity fluid streams created by the pressure drop to collide into each other in the center of the trim. The impact of the streams converts the energy and protects the downstream components from damage.


Control Element

The RB Series valve features several unique design characteristics that minimize wear and maximize service life.

The nozzle and external sleeve trim is designed to contain turbulence and wear by managing the flow into the nozzle and centralizing it into bore causing the flow streams to impinge on each other. The valve body and outlet are protected from wear because the energy conversion as a result of the pressure drop is concentrated in the trim cavity before flow enters the outlet. This eliminates the typical wear problems in the valve outlet.



The upstream and downstream balanced sleeve design greatly reduces the breakaway and closing thrust requirements to lift the sleeve on and off seat as well as during stem travel making the control stable and precise yielding better accuracy and repeatability.

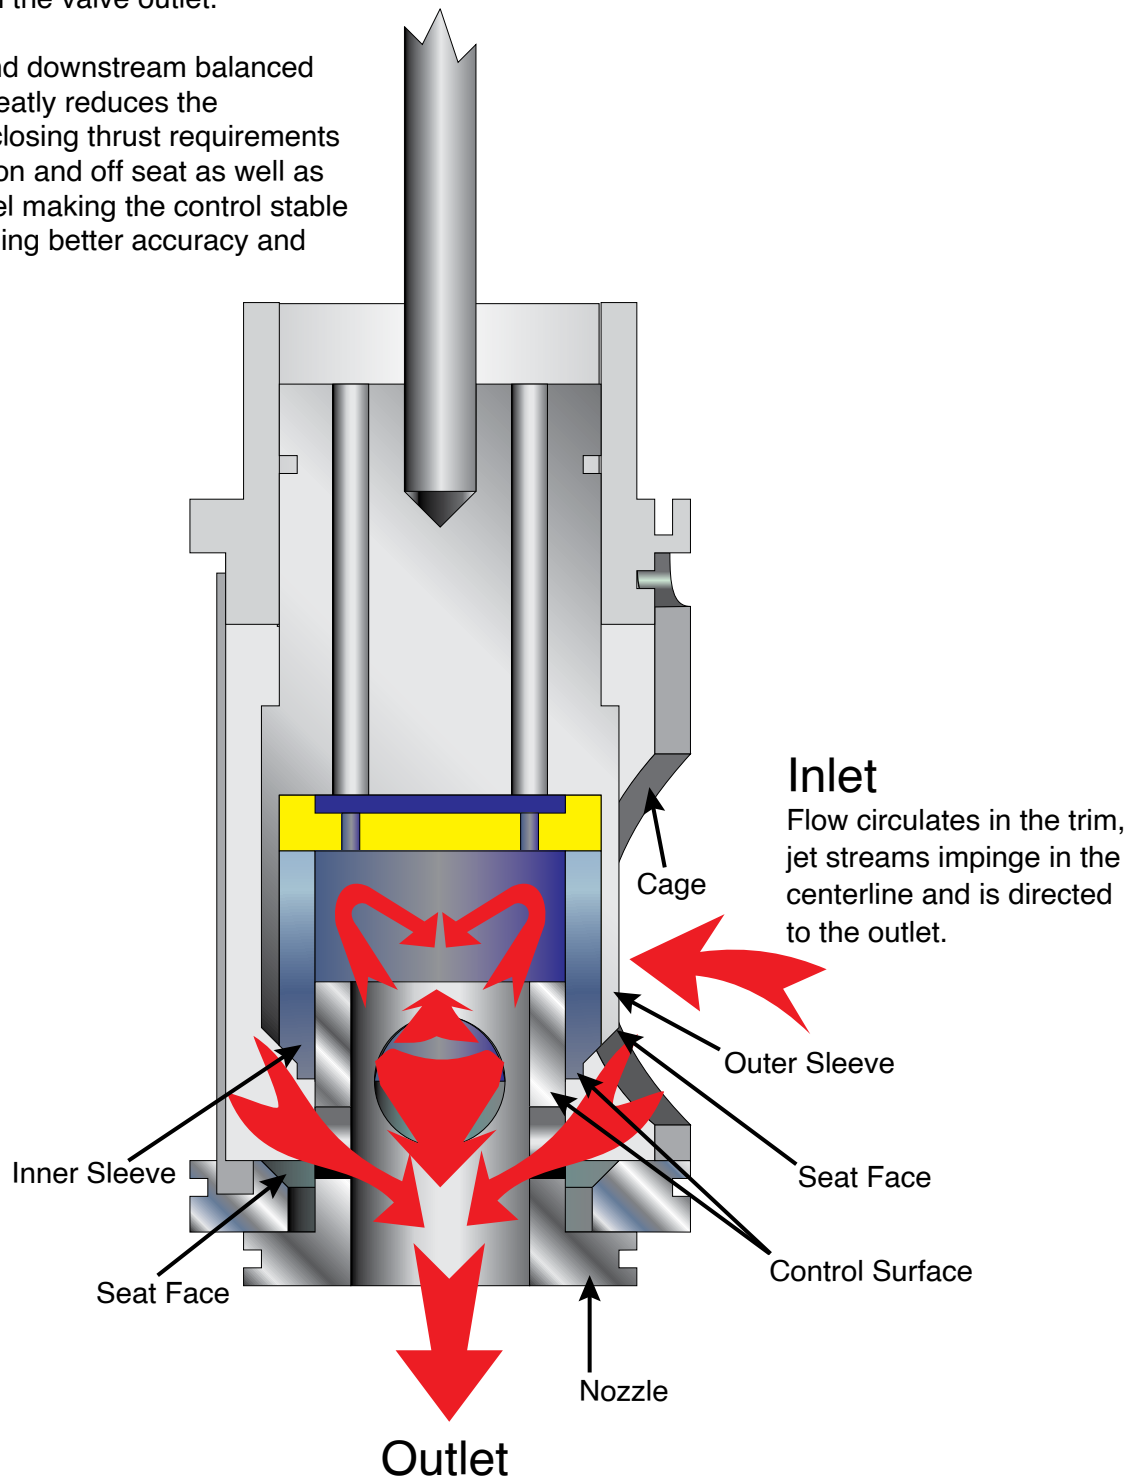


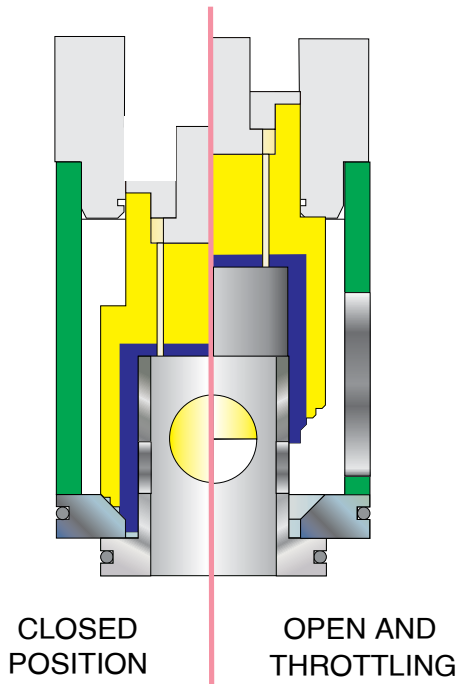

The Trim configuration has been field-tested and proven to deliver superior wear resistance and performance. The trim controls high velocity fluid during pressure reduction by directing the flow to the center of the flow nozzle. The Erosive Energy is contained within the expendable trim components away from the valve wall which is additionally protected by a replaceable sleeve, reducing the potential for release of fluids to the environment. The seat and Tri-seating surfaces on the sleeve are separate from the controlling surfaces and out of the flow path to maintain an ANSI class V shut off.

Tri-Seat Sealing Technology

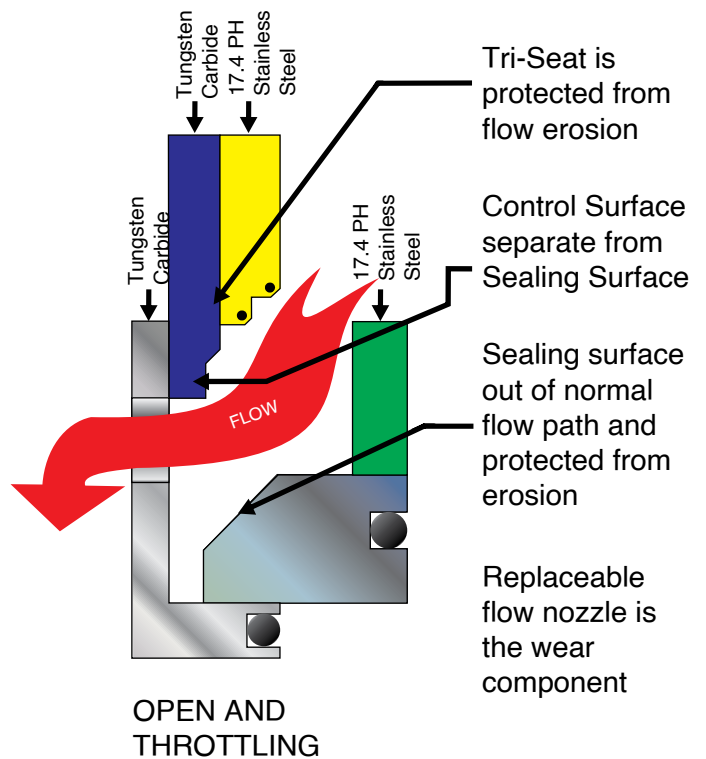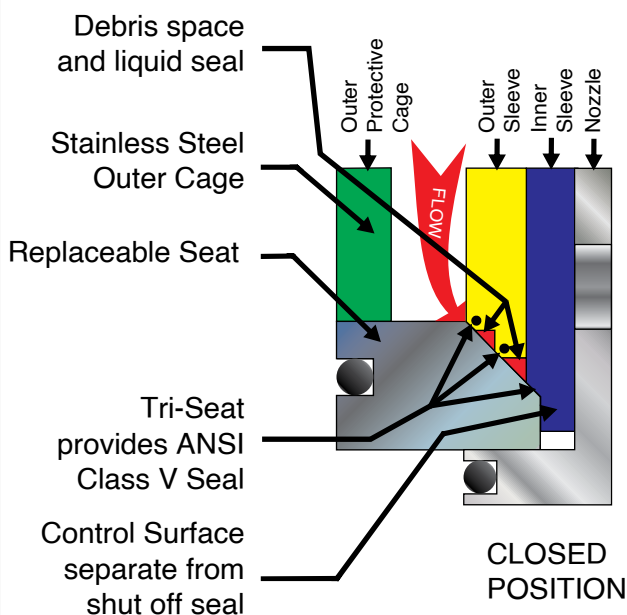

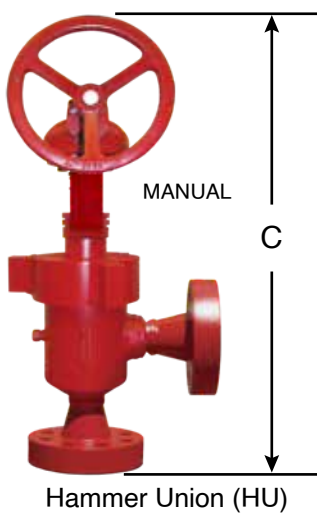

RB2 Control Choke

Cv = 3, 6, 12, 35



Max Bean Size = 78 / 64th's

Stroke Length = 1.25"

Stem Diameter = 0.625"

MAWP = 10,000 PSIG

HU MAWP = 15,000 PSIG

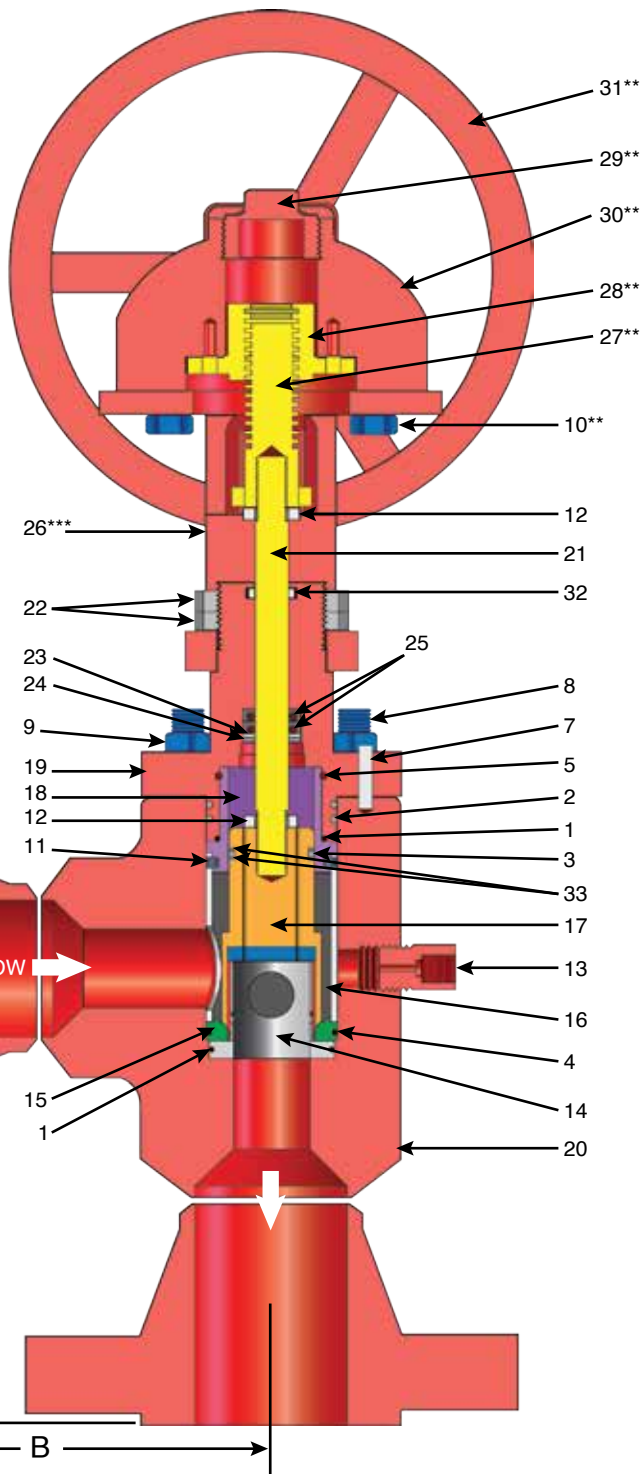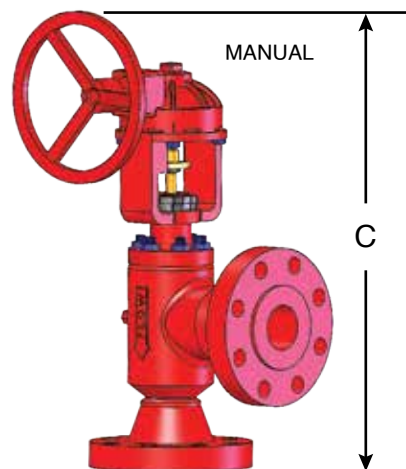

ITEM	DESCRIPTION	QTY
1	O-RING 2-032	2
2	O-RING 2-228	2
3	O-RING 2-221	1
4	O-RING 2-140	1
5	O-RING 2-135	1
6*	DOWEL PIN	2
7	DOWEL PIN	1
8	STUD	6
9	HEX NUT	6
10**	HEX BOLT	4
11*	SET SCREW	2
12	HEX NUT (Lock Nut)	2
13	VENT VALVE	1
14	NOZZLE	1
15	SEAT	1
16	CAGE	1
17	EXTERNAL SLEEVE ASSEMBLY	1
18	EXTERNAL SLEEVE GUIDE	1
19	BONNET	1
20	BODY/FLANGE WELDMENT	1
21	STEM	1
22	YOKE LOCK NUT	2
23	WASHER	1
24	SNAP RING	1
25	U-CUP SEALS	1
26***	YOKE	1
27**	ANTI-ROTATIONAL DEVICE	1
28**	STEM ADAPTER	1
29**	PIPE PLUG	1
30**	DIAMOND GEAR ACTUATOR	1
31**	HANDWHEEL	1
32	WIPER SEAL (Dust Cap)	1
33	BACK UP RINGS	2


*Item not visible in sectioned view

**Parts not included on actuator

***Optional depending on actuator type
(Contact TVT for information)


CONNECTIONS		DIMENSIONS - IN. (MM.)			WEIGHT	
INLET	OUTLET	"A"	"B"	"C"	LB.	KG.
2" BW	2" BW	4.50 (114)	4.50 (114)	23.10 (587)	80	36
2" 300 RFF	2" 300 RFF	7.25 (184)	7.25 (184)	25.85 (657)	96	44
2" 600 RFF	2" 600 RFF	7.62 (194)	7.62 (194)	26.22 (666)	100	45
2" 600 RTJ	2" 600 RTJ	7.69 (195)	7.69 (195)	26.29 (668)	100	45
2" 900/1500 RTJ	2" 900/1500 RTJ	8.81 (223)	8.81 (223)	27.41 (696)	128	58
2" 2500 RTJ	2" 2500 RTJ	9.81 (249)	9.81 (249)	28.41 (722)	164	74
3" BW	3" BW	4.50 (114)	4.50 (114)	23.10 (587)	80	36
3" 300 RFF	3" 300 RFF	7.63 (194)	7.63 (194)	26.23 (666)	110	50
3" 600 RFF	3" 600 RFF	8.00 (203)	8.00 (203)	26.60 (676)	126	57
3" 900 RTJ	3" 900 RTJ	8.81 (224)	8.81 (224)	27.41 (696)	138	63
3" 1500 RFF	3" 1500 RFF	9.38 (238)	9.38 (238)	27.98 (711)	176	80
3" 1500 RTJ	3" 1500 RTJ	9.44 (240)	9.44 (240)	28.04 (712)	176	80
3" 2500 RTJ	3" 2500 RTJ	11.44 (290)	11.44 (290)	30.04 (763)	268	122
2-1/16" API 5000	2-1/16" API 5000	8.81 (224)	8.81 (224)	27.41 (696)	128	58
2-1/16" API 10000	2-1/16" API 10000	9.01 (229)	9.01 (229)	27.61 (701)	122	55
2-1/16" API 15000	2-1/16" API 15000	9.01 (229)	9.01 (229)	27.61 (701)	122	55
2-9/16" API 5000	2-9/16" API 5000	8.94 (227)	8.94 (227)	27.54 (700)	154	70
2-9/16" API 10000	2-9/16" API 10000	9.52 (242)	9.52 (242)	28.12 (714)	150	68
2-9/16" API 15000	2-9/16" API 15000	9.52 (242)	9.52 (242)	28.12 (714)	150	68
3-1/8" API 5000	3-1/8" API 5000	9.44 (240)	9.44 (240)	28.04 (712)	176	80
3-1/8" API 10000	3-1/8" API 10000	9.52 (242)	9.52 (242)	28.12 (714)	243	110
3-1/8" API 15000	3-1/8" API 15000	9.52 (242)	9.52 (242)	20.5.12 (521)	496	225

ALL DIMENSIONS ARE +/- .10"


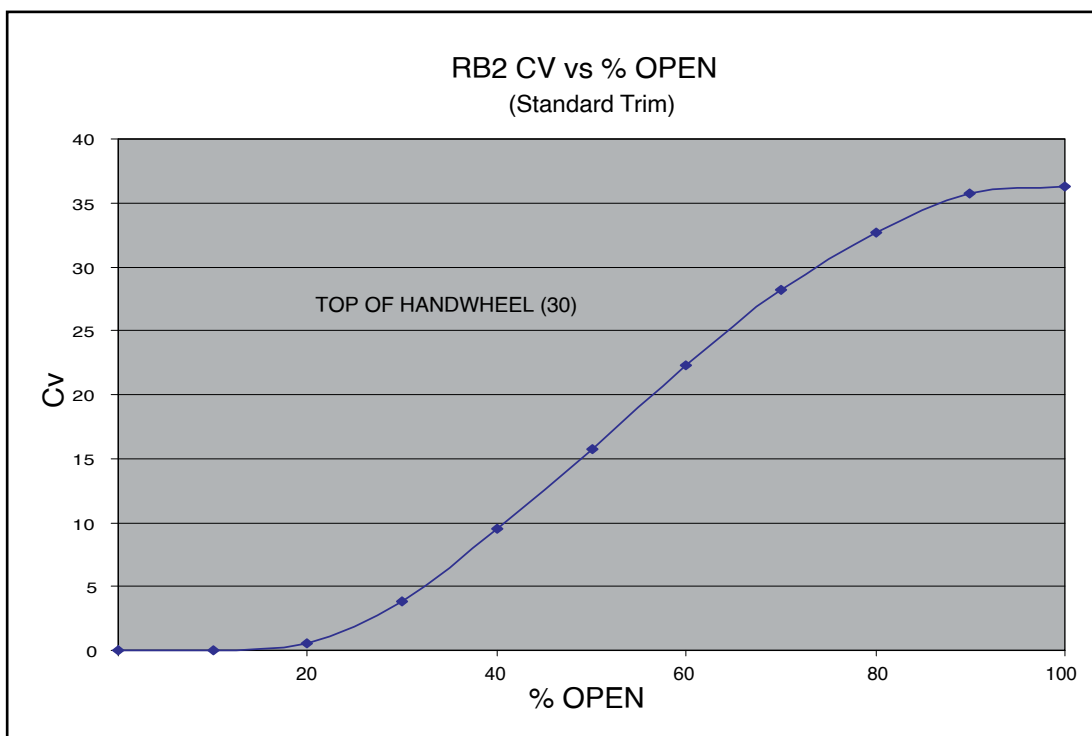


NOTE: Taylor Valve reserves the right to change product designs and specifications without notice.

RB3 Cutaway View

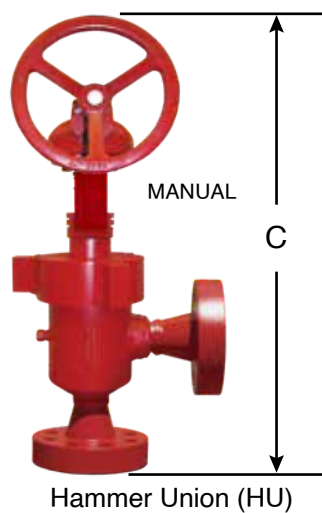

RB3 Control Choke
 Cv = 35, 64, 78, 95, 115
 Max Bean Size = 141 / 64th's
 Stroke Length = 1.75"
 Stem Diameter = 0.625"
 MAWP = 6,000/10,000 PSIG
 HU MAWP = 10,000 PSIG

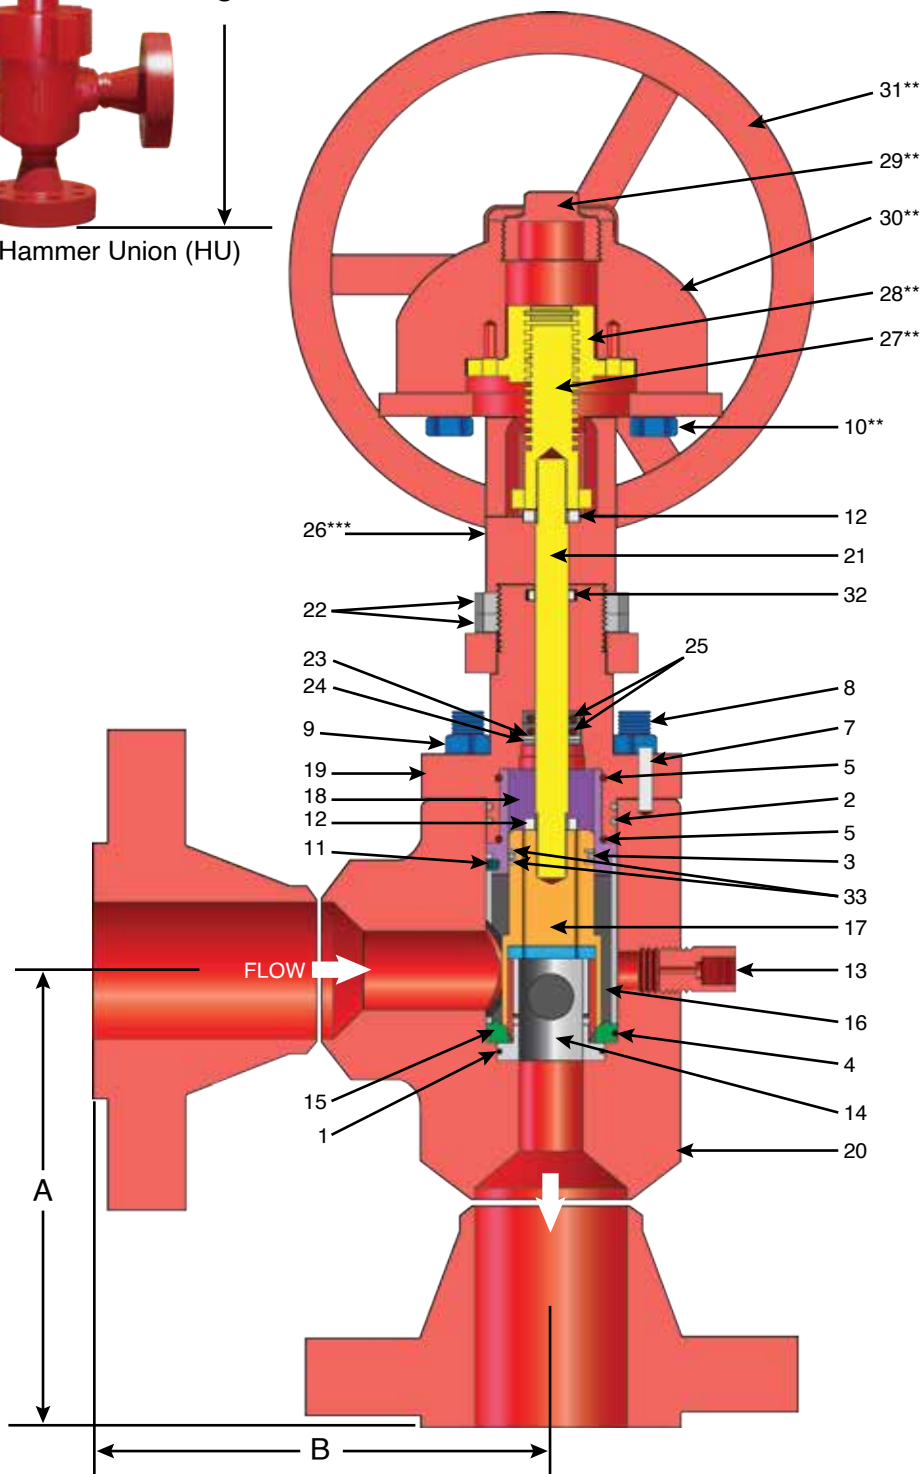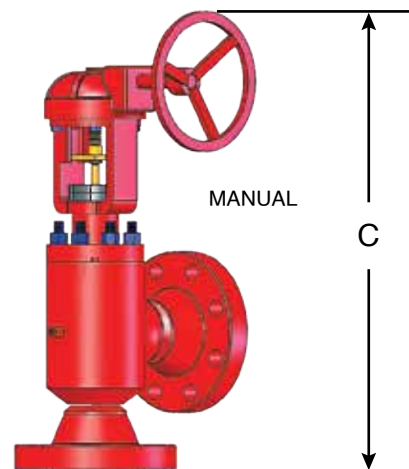

ITEM	DESCRIPTION	QTY
1	O-RING 2-237	1
2	O-RING 2-242	2
3	O-RING 2-230	1
4	O-RING 2-241	1
5	O-RING 2-152	2
6*	DOWEL PIN	2
7	DOWEL PIN	1
8	STUD	8
9	HEX NUT	8
10**	HEX BOLT	4
11*	SET SCREW	2
12	HEX NUT (Lock Nut)	2
13	VENT VALVE	1
14	NOZZLE	1
15	SEAT	1
16	CAGE	1
17	EXTERNAL SLEEVE ASSEMBLY	1
18	EXTERNAL SLEEVE GUIDE	1
19	BONNET	1
20	BODY/FLANGE WELDMENT	1
21	STEM	1
22	YOKE LOCK NUT	2
23	WASHER	1
24	SNAP RING	1
25	U-CUP SEALS	1
26***	YOKE	1
27**	ANTI-ROTATIONAL DEVICE	1
28**	STEM ADAPTER	1
29**	PIPE PLUG	1
30**	DIAMOND GEAR ACTUATOR	1
31**	HANDWHEEL	1
32	WIPER SEAL (Dust Cap)	1
33	BACK UP RINGS	2


*Item not visible in sectioned view

**Parts not included on actuator

***Optional depending on actuator type
 (Contact TVT for information)

CONNECTIONS		DIMENSIONS - IN. (MM.)			WEIGHT	
INLET	OUTLET	"A"	"B"	"C"	LB.	KG.
3" BW	3" BW	5.25 (133)	5.25 (133)	28.12 (714)	154	70
3" 150 RFF	3" 150 RFF	8.00 (203)	8.00 (203)	30.87 (784)	177	80
3" 300 RFF	3" 300 RFF	8.38 (213)	8.38 (213)	31.25 (794)	185	83
3" 600 RFF	3" 600 RFF	8.75 (222)	8.75 (222)	31.62 (803)	190	86
3" 600 RTJ	3" 600 RTJ	8.81 (223)	8.81 (223)	31.68 (805)	190	86
3" 900 RFF	3" 900 RFF	9.50 (241)	9.50 (241)	32.37 (822)	212	96
3" 900 RTJ	3" 900 RTJ	9.56 (243)	9.56 (243)	32.43 (824)	212	96
3" 1500 RFF	3" 1500 RFF	10.12 (257)	10.12 (257)	33.00 (838)	250	114
3" 1500 RTJ	3" 1500 RTJ	10.19 (259)	10.19 (259)	33.06 (840)	250	114
3" 2500 RFF	3" 2500 RFF	12.13 (308)	12.13 (308)	35.00 (889)	342	155
3" 2500 RTJ	3" 2500 RTJ	12.25 (311)	12.25 (311)	35.12 (892)	342	155
4" BW	4" BW	5.25 (133)	5.25 (133)	28.12 (714)	154	70
4" 150 RFF	4" 150 RFF	8.25 (210)	8.25 (210)	31.12 (790)	187	85
4" 300 RFF	4" 300 RFF	8.62 (219)	8.62 (219)	31.49 (800)	207	94
4" 600 RFF	4" 600 RFF	9.50 (241)	9.50 (241)	32.37 (822)	228	104
4" 600 RTJ	4" 600 RTJ	9.56 (243)	9.56 (243)	32.43 (824)	228	104
4" 900 RFF	4" 900 RFF	10.00 (254)	10.00 (254)	32.87 (835)	256	116
4" 900 RTJ	4" 900 RTJ	10.06 (256)	10.06 (256)	32.93 (836)	256	116
4" 1500 RFF	4" 1500 RFF	10.38 (263)	10.38 (263)	33.25 (845)	292	133
4" 1500 RTJ	4" 1500 RTJ	10.44 (265)	10.44 (265)	33.31 (846)	292	133
4" 2500 RFF	4" 2500 RFF	13.00 (330)	13.00 (330)	35.87 (911)	444	201
4" 2500 RTJ	4" 2500 RTJ	13.19 (335)	13.19 (335)	36.06 (916)	444	201
3-1/8" API 3000	3-1/8" API 3000	9.56 (342)	9.56 (342)	32.43 (824)	212	96
3-1/8" API 5000	3-1/8" API 5000	10.19 (258)	10.19 (258)	33.06 (840)	250	114
4-1/16" API 3000	4-1/16" API 3000	10.06 (255)	10.06 (255)	32.93 (836)	256	116
4-1/16" API 5000	4-1/16" API 5000	10.44 (265)	10.44 (265)	33.31 (846)	292	133

ALL DIMENSIONS ARE +/- .10"

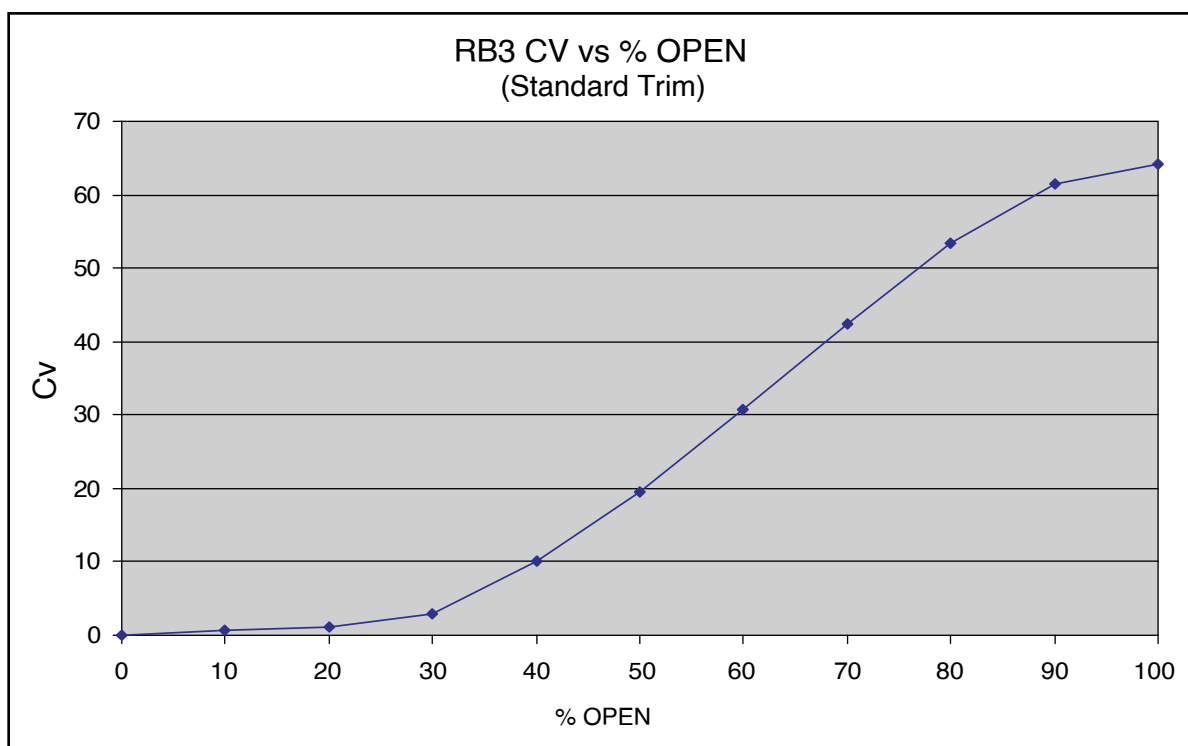

RB4 Cutaway View

RB4 Control Choke



Cv = 80, 164

Max Bean Size = 169 / 64th's

Stroke Length = 2.45"

Stem Diameter = .75"

MAWP = 6,000/10,000 PSIG

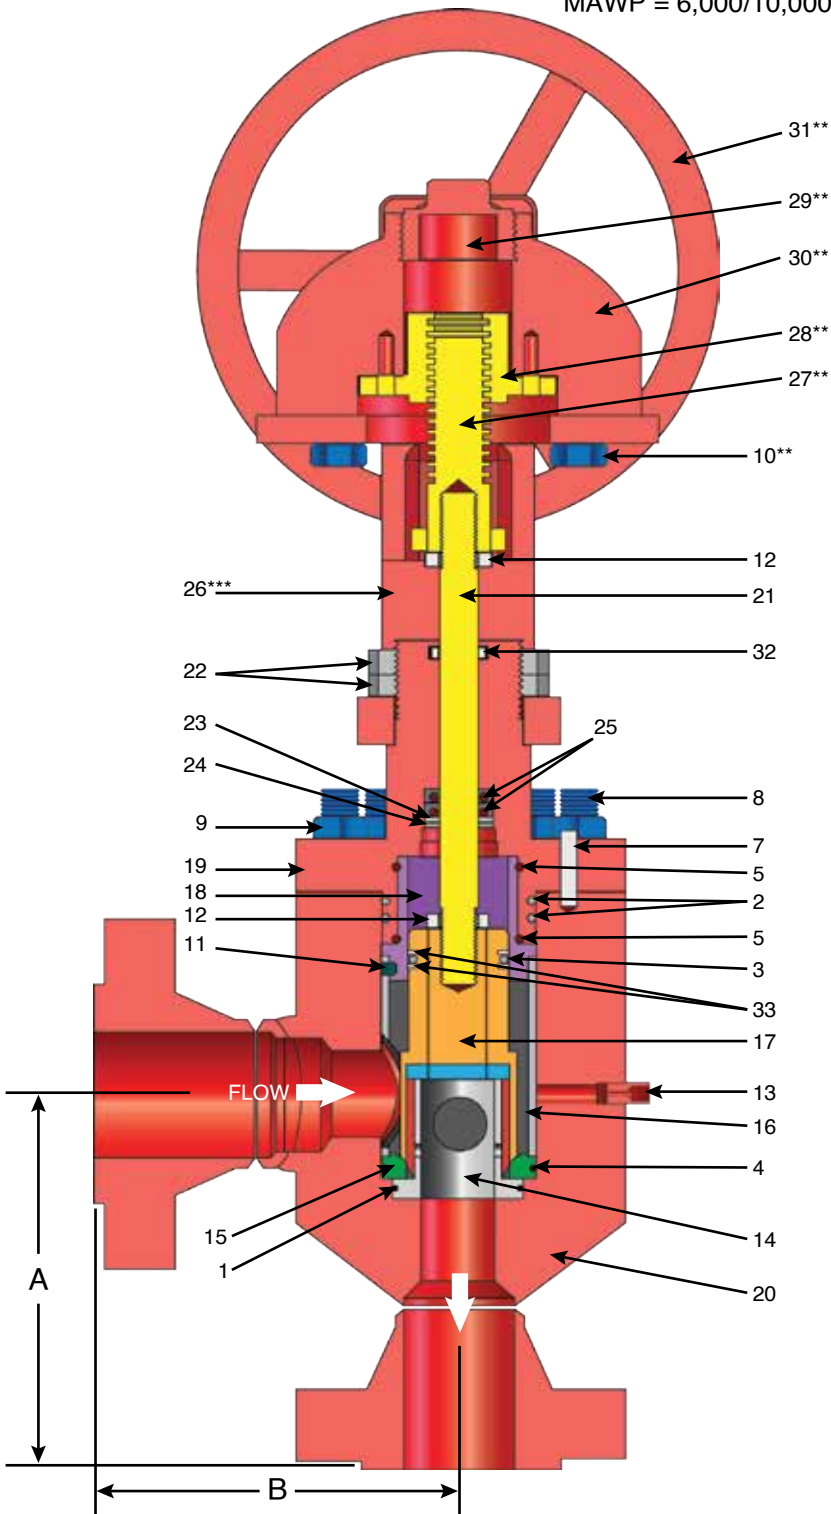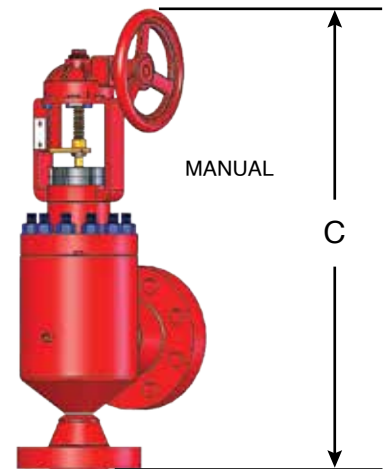

ITEM	DESCRIPTION	QTY
1	O-RING 2-246	1
2	O-RING 2-250	2
3	O-RING 2-237	1
4	O-RING 2-249	1
5	O-RING 2-243	2
6*	DOWEL PIN	2
7	DOWEL PIN	1
8	STUD	12
9	HEX NUT	12
10**	HEX BOLT	4
11*	SET SCREW	2
12	HEX NUT (Lock Nut)	2
13	VENT VALVE	1
14	NOZZLE	1
15	SEAT	1
16	CAGE	1
17	EXTERNAL SLEEVE ASSEMBLY	1
18	EXTERNAL SLEEVE GUIDE	1
19	BONNET	1
20	BODY/FLANGE WELDMENT	1
21	STEM	1
22	YOKE LOCK NUT	2
23	WASHER	1
24	SNAP RING	1
25	U-CUP SEALS	1
26***	YOKE	1
27**	ANTI-ROTATIONAL DEVICE	1
28**	STEM ADAPTER	1
29**	PIPE PLUG	1
30**	DIAMOND GEAR ACTUATOR	1
31**	HANDWHEEL	1
32	WIPER SEAL (Dust Cap)	1
33	BACK UP RINGS	2


*Item not visible in sectioned view

**Parts not included on actuator

***Optional depending on actuator type
(Contact TVT for information)

CONNECTIONS		DIMENSIONS - IN. (MM.)			WEIGHT	
INLET	OUTLET	"A"	"B"	"C"	LB.	KG.
4" BW	4" BW	6.50 (165)	6.50 (165)	34.38 (873)	367	166
4" 150 RFF	4" 150 RFF	9.50 (241)	9.50 (241)	37.38 (949)	397	180
4" 300 RFF	4" 300 RFF	9.88 (251)	9.88 (251)	37.76 (959)	417	189
4" 600 RFF	4" 600 RFF	10.75 (273)	10.75 (273)	38.63 (981)	451	205
4" 600 RTJ	4" 600 RTJ	10.81 (275)	10.81 (275)	38.69 (983)	451	205
4" 900 RFF	4" 900 RFF	11.25 (286)	11.25 (286)	39.13 (994)	479	217
4" 900 RTJ	4" 900 RTJ	11.31 (287)	11.31 (287)	39.19 (995)	479	217
4" 1500 RFF	4" 1500 RFF	11.63 (295)	11.63 (295)	39.51 (1004)	515	234
4" 1500 RTJ	4" 1500 RTJ	11.69 (297)	11.69 (297)	39.57 (1005)	515	234
4" 2500 RFF	4" 2500 RFF	14.25 (362)	14.25 (362)	42.13 (1070)	669	304
4" 2500 RTJ	4" 2500 RTJ	14.44 (367)	14.44 (367)	42.32 (1075)	669	304
6" BW	6" BW	6.50 (165)	6.50 (165)	34.38 (873)	367	166
6" 150 RFF	6" 150 RFF	10.00 (254)	10.00 (254)	37.88 (962)	415	188
6" 300 RFF	6" 300 RFF	10.38 (264)	10.38 (264)	38.26 (972)	451	205
6" 600 RFF	6" 600 RFF	11.38 (289)	11.38 (289)	39.26 (997)	529	240
6" 600 RTJ	6" 600 RTJ	11.44 (291)	11.44 (291)	39.32 (999)	529	240
6" 900 RFF	6" 900 RFF	12.25 (311)	12.25 (311)	40.13 (1019)	597	271
6" 900 RTJ	6" 900 RTJ	12.31 (313)	12.31 (313)	40.19 (1021)	597	271
6" 1500 RFF	6" 1500 RFF	13.50 (342)	13.50 (342)	41.38 (1051)	705	320
6" 1500 RTJ	6" 1500 RTJ	13.62 (346)	13.62 (346)	41.50 (1054)	705	320
6" 2500 RFF	6" 2500 RFF	17.50 (445)	17.50 (445)	45.38 (1153)	1133	514
6" 2500 RTJ	6" 2500 RTJ	17.75 (451)	17.75 (451)	45.63 (1159)	1133	514
4-1/16" 3000 API	4-1/16" 3000 API	11.31 (287)	11.31 (287)	39.19 (995)	479	217
4-1/16" 5000 API	4-1/16" 5000 API	11.69 (297)	11.69 (297)	39.57 (1005)	515	234

ALL DIMENSIONS ARE +/- .10"

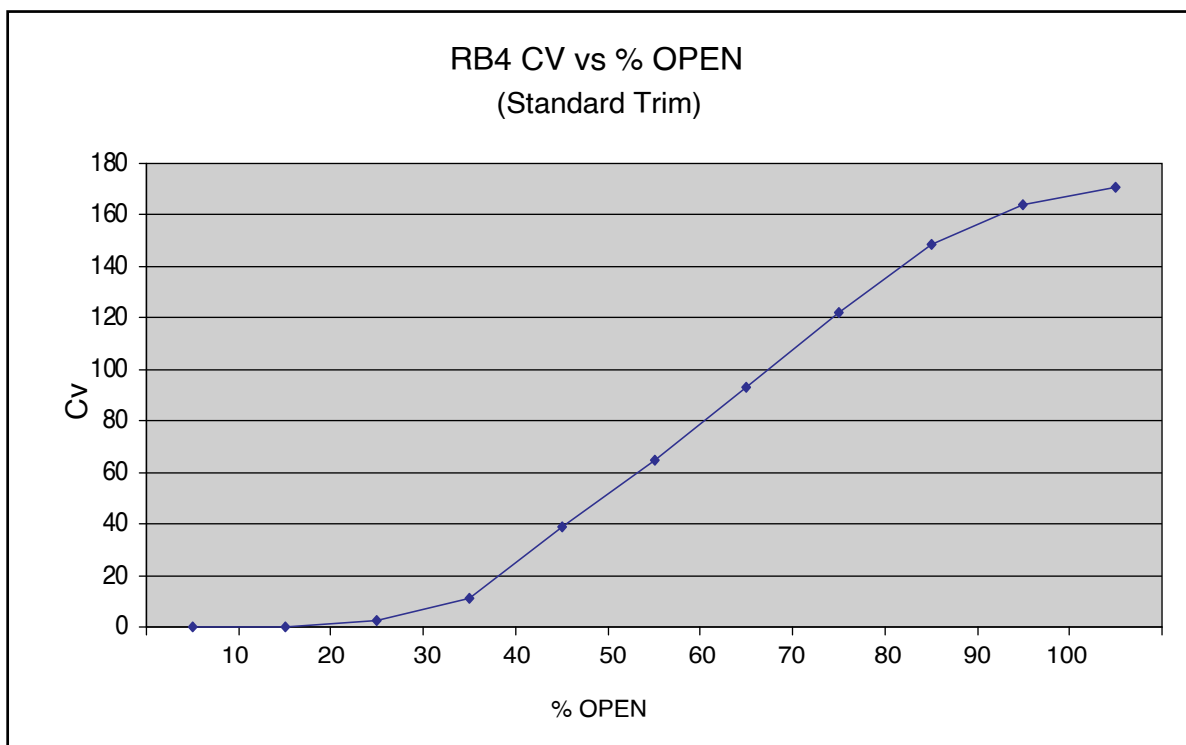

RB6 Cutaway View

RB6 Control Choke



Cv = 78, 420

Max Bean Size = 270 / 64th's

Stroke Length = 4.25"

Stem Diameter = 1.00"

MAWP = 6,000 PSIG

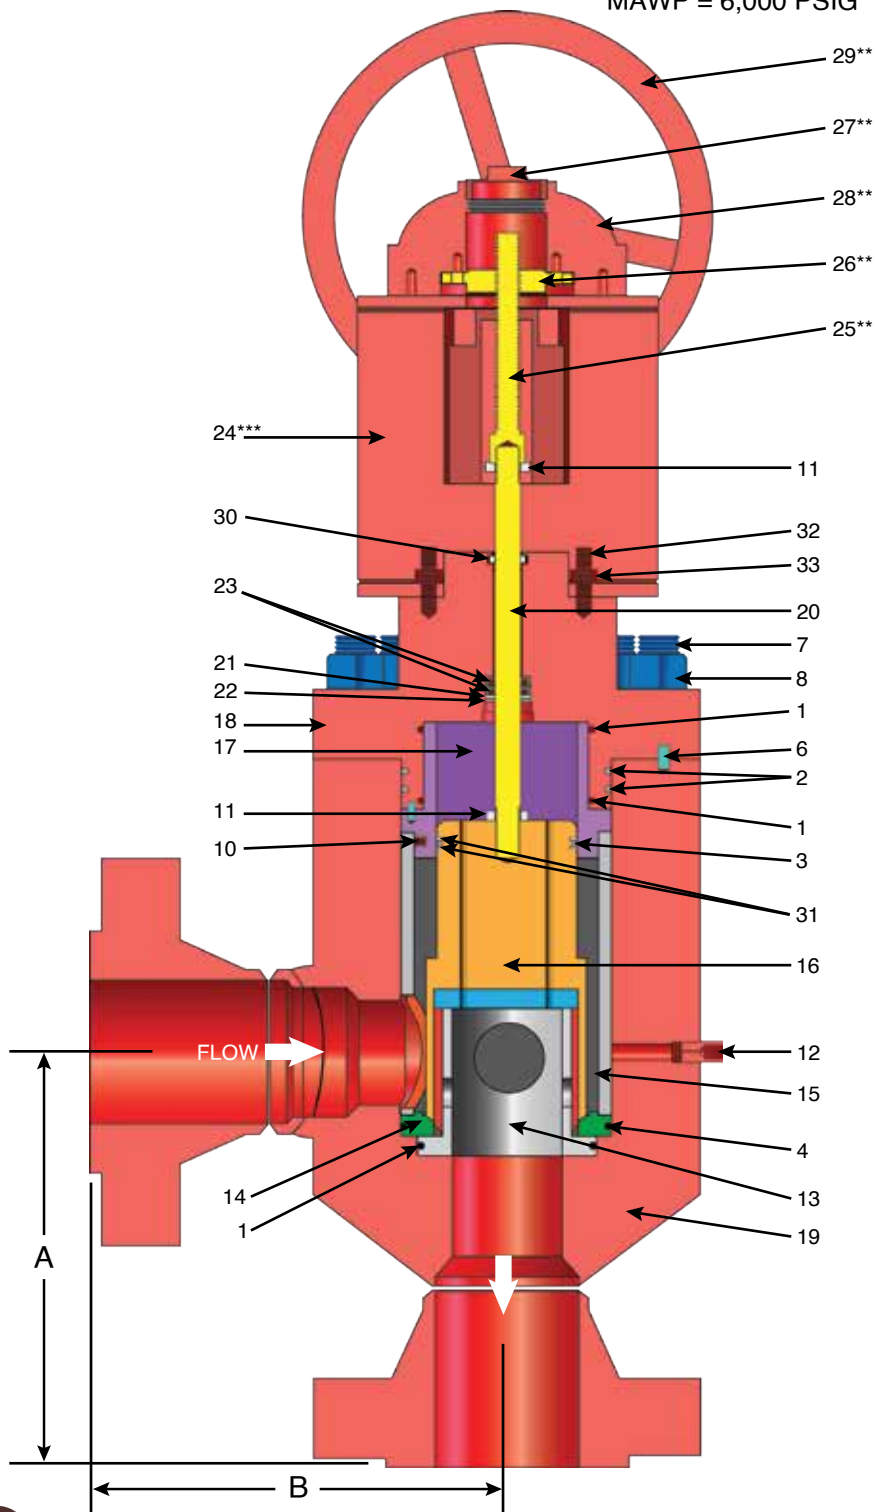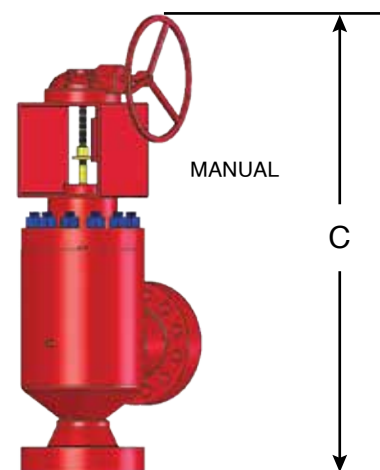

ITEM	DESCRIPTION	QTY
1	O-RING 2-363	3
2	O-RING 2-369	2
3	O-RING 2-355	1
4	O-RING 2-367	1
5*	DOWEL PIN	2
6	DOWEL PIN	1
7	STUD	12
8	HEX NUT	12
9*	HEX BOLT	4
10*	SET SCREW	2
11	HEX NUT (Lock Nut)	2
12	VENT VALVE	1
13	NOZZLE	1
14	SEAT	1
15	CAGE	1
16	EXTERNAL SLEEVE ASSEMBLY	1
17	EXTERNAL SLEEVE GUIDE	1
18	BONNET	1
19	BODY/FLANGE WELDMENT	1
20	STEM	1
21	WASHER	1
22	SNAP RING	1
23	U-CUP SEALS	1
24***	BRACKET	1
25**	ANTI-ROTATIONAL DEVICE	1
26**	STEM ADAPTER	1
27**	PIPE PLUG	1
28**	DIAMOND GEAR ACTUATOR	1
29**	HANDWHEEL	1
30	WIPER SEAL (Dust Cap)	1
31	BACK UP RINGS	2
32	STUD	8
33	NUT	8


*Item not visible in sectioned view

**Parts not included on actuator

***Optional depending on actuator type
(Contact TVT for information)

CONNECTIONS		DIMENSIONS - IN. (MM.)			WEIGHT	
INLET	OUTLET	"A"	"B"	"C"	LB.	KG.
6" BW	6" BW	9.50 (241)	9.50 (241)	33.54 (852)	767	348
6" 150 RFF	6" 150 RFF	13.00 (330)	13.00 (330)	37.04 (941)	815	370
6" 300 RFF	6" 300 RFF	13.38 (340)	13.38 (340)	37.42 (950)	851	386
6" 600 RFF	6" 600 RFF	14.38 (365)	14.38 (365)	38.42 (976)	929	422
6" 600 RTJ	6" 600 RTJ	14.44 (368)	14.44 (368)	38.48 (977)	929	422
6" 900 RFF	6" 900 RFF	15.25 (387)	15.25 (387)	39.29 (998)	1003	455
6" 900 RTJ	6" 900 RTJ	15.31 (389)	15.31 (389)	39.35 (999)	1003	455
6" 1500 RFF	6" 1500 RFF	16.50 (419)	16.50 (419)	40.54 (1030)	1111	504
6" 1500 RTJ	6" 1500 RTJ	16.62 (422)	16.62 (422)	40.66 (1033)	1111	504
6" 2500 RFF	6" 2500 RFF	20.50 (521)	20.50 (521)	44.54 (1131)	1539	699
6" 2500 RTJ	6" 2500 RTJ	20.75 (527)	20.75 (527)	44.79 (1138)	1539	699
8" BW	8" BW	9.50 (241)	9.50 (241)	33.54 (852)	767	348
8" 150 RFF	8" 150 RFF	13.50 (343)	13.50 (343)	37.54 (954)	845	383
8" 300 RFF	8" 300 RFF	13.88 (353)	13.88 (353)	37.92 (963)	901	409
8" 600 RFF	8" 600 RFF	15.00 (381)	15.00 (381)	39.04 (992)	1007	457
8" 600 RTJ	8" 600 RTJ	15.06 (383)	15.06 (383)	39.10 (993)	1007	457
8" 900 RFF	8" 900 RFF	16.13 (410)	16.13 (410)	40.17 (1020)	1157	525
8" 900 RTJ	8" 900 RTJ	16.19 (411)	16.19 (411)	40.23 (1022)	1157	525
8" 1500 RFF	8" 1500 RFF	18.13 (461)	18.13 (461)	42.17 (1071)	1329	603
8" 1500 RTJ	8" 1500 RTJ	18.31 (465)	18.31 (465)	42.35 (1076)	1329	603
8" 2500 RFF	8" 2500 RFF	22.25 (565)	22.25 (565)	46.29 (1176)	1935	878
8" 2500 RTJ	8" 2500 RTJ	22.56 (573)	22.56 (573)	46.60 (1184)	1935	878
7-1/16" API 3000	7-1/16" API 3000	15.31 (389)	15.31 (389)	39.35 (999)	1157	525
7-1/16" API 5000	7-1/16" API 5000	16.63 (422)	16.63 (422)	40.67 (1033)	1329	603

ALL DIMENSIONS ARE +/- .10"

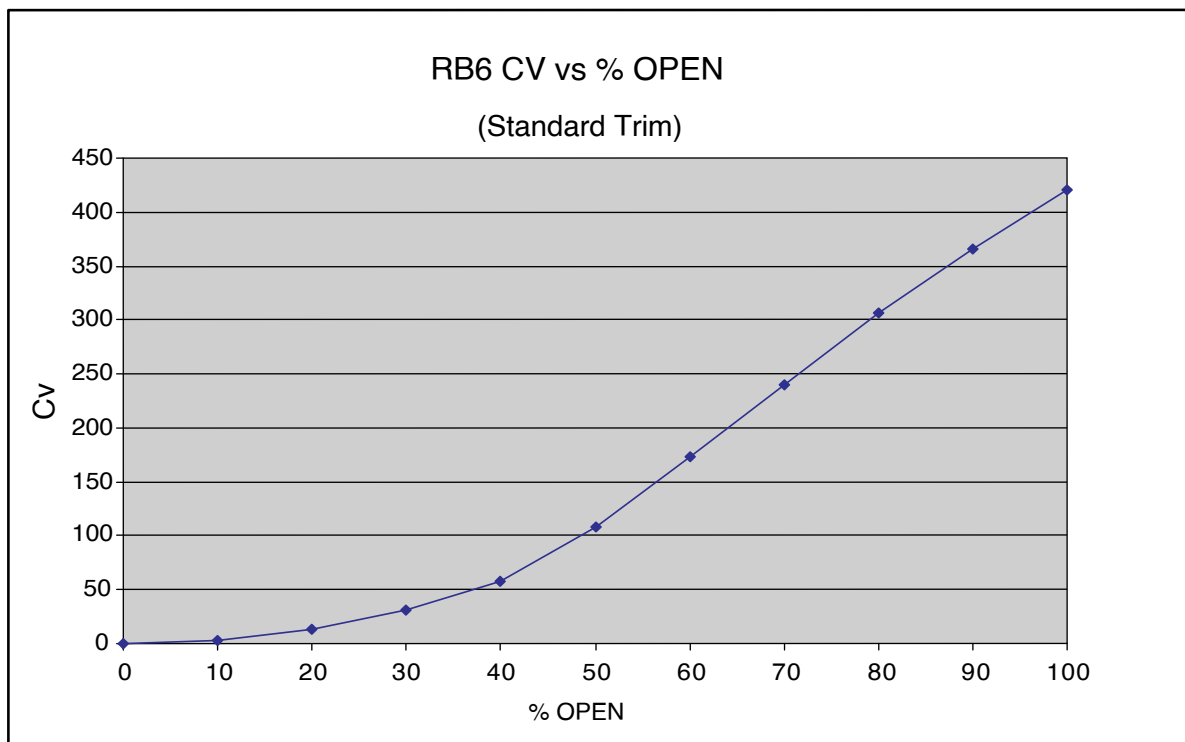

Electric Actuators

Multi - Turn



**Actuator Shown -
IQTF 125 Rotork**

- 24 Volt DC Supply
- Max Torque 92 ft. lbs.
- NEMA 4 Enclosure
- Side Mounted Hand wheel
- Weight 49 lbs.
- Used on RB 2" & 3"

**Actuator Shown -
IQTF 250 Rotork**

- 24 Volt DC Supply
- Max Torque 180 ft. lbs.
- NEMA 4 Enclosure
- Side Mounted Hand wheel
- Weight 49 lbs.
- Used on RB 2" & 3"



**Actuator Shown -
IQS 35 Rotork**

- Single Phase Supply
(120v or 220v)
- Max Torque 230 ft. lbs.
- NEMA 4 Enclosure
- Top Mounted Hand wheel
- Appx. Weight 160 lbs.
- Used on RB 3", 4" & 6"



Pneumatic Actuators

Spring Cylinder



**Actuator Shown -
Valtek VL 25***

- Double Acting Configuration
- Actuation Air Pressure Max 120psi
- NEMA 4 Enclosure
- Optional Manual Hand Wheel
- Optional Positioners
- Used on RB 2"

*Valtek VL100 also available for RB 4" & RB 6"

**Actuator Shown -
Valtek VL 50***

- Double Acting Configuration
- Actuation Air Pressure Max 120psi
- NEMA 4 Enclosure
- Optional Manual Hand Wheel
- Optional Positioners
- Used on RB 3"

*Valtek VL100 also available for RB 4" & RB 6"



**Actuator Shown -
Valtek VL 100**

- Double Acting Configuration
- Actuation Air Pressure
Max 120psi
- NEMA 4 Enclosure
- Optional Manual Hand Wheel
- Optional Positioners
- Used on RB 6"



Pneumatic Actuators

Spring Diaphragm




**Actuator Shown -
Fisher Pneumatic
Spring Diaphragm**

- Single or Double Acting Configuration
- Actuation Air Pressure 30psi
- NEMA 4 Enclosure
- Optional Positioners
- Used on R1 & RB 2"



**Actuator Shown -
Fisher Pneumatic
Spring Diaphragm**

- Single or Double Acting Configuration
- Actuation Air Pressure 30psi
- NEMA 4 Enclosure
- Optional Positioners
- Used on R1 & RB 2"

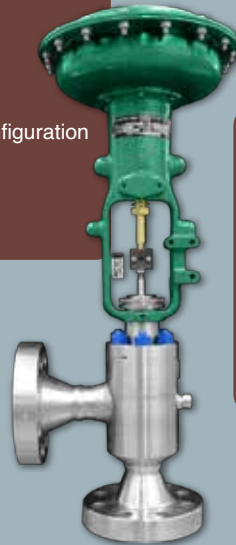

**Actuator Shown -
Dynaflow Pneumatic
Spring Diaphragm**

- Single or Double Acting Configuration
- Actuation Air Pressure 1-20psi
- NEMA 4 Enclosure
- Optional Positioners
- Used on RB 2"

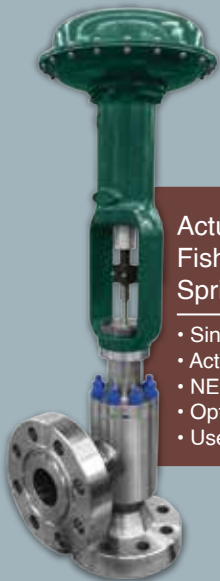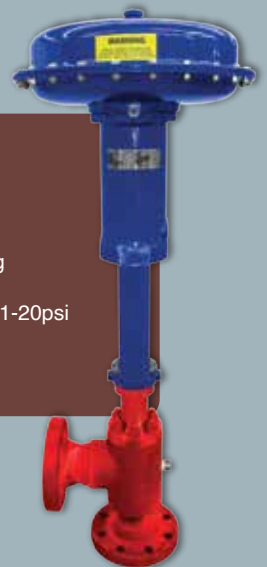

**Actuator Shown -
Fisher Pneumatic
Spring Diaphragm**

- Single or Double Acting Configuration
- Actuation Air Pressure 11-30psi
- NEMA 4 Enclosure
- Optional Positioners
- Used on RB 3"



**Actuator Shown -
Kimray Pneumatic
Spring Diaphragm**

- Single or Double Acting Configuration
- Actuation Air Pressure 30psi
- NEMA 4 Enclosure
- Optional Positioners
- Used on RB 2" & 3"


**Actuator Shown -
Dynaflow Pneumatic
Spring Diaphragm**

- Single or Double Acting Configuration
- Actuation Air Pressure 1-20psi
- NEMA 4 Enclosure
- Optional Positioners
- Used on RB 4"



Note: Actuators shown are not manufactured by Taylor Valve, but bought as per customer requested specifications for their applications/installations. Consult Taylor Valve for more options.

RB Choke Nomenclature

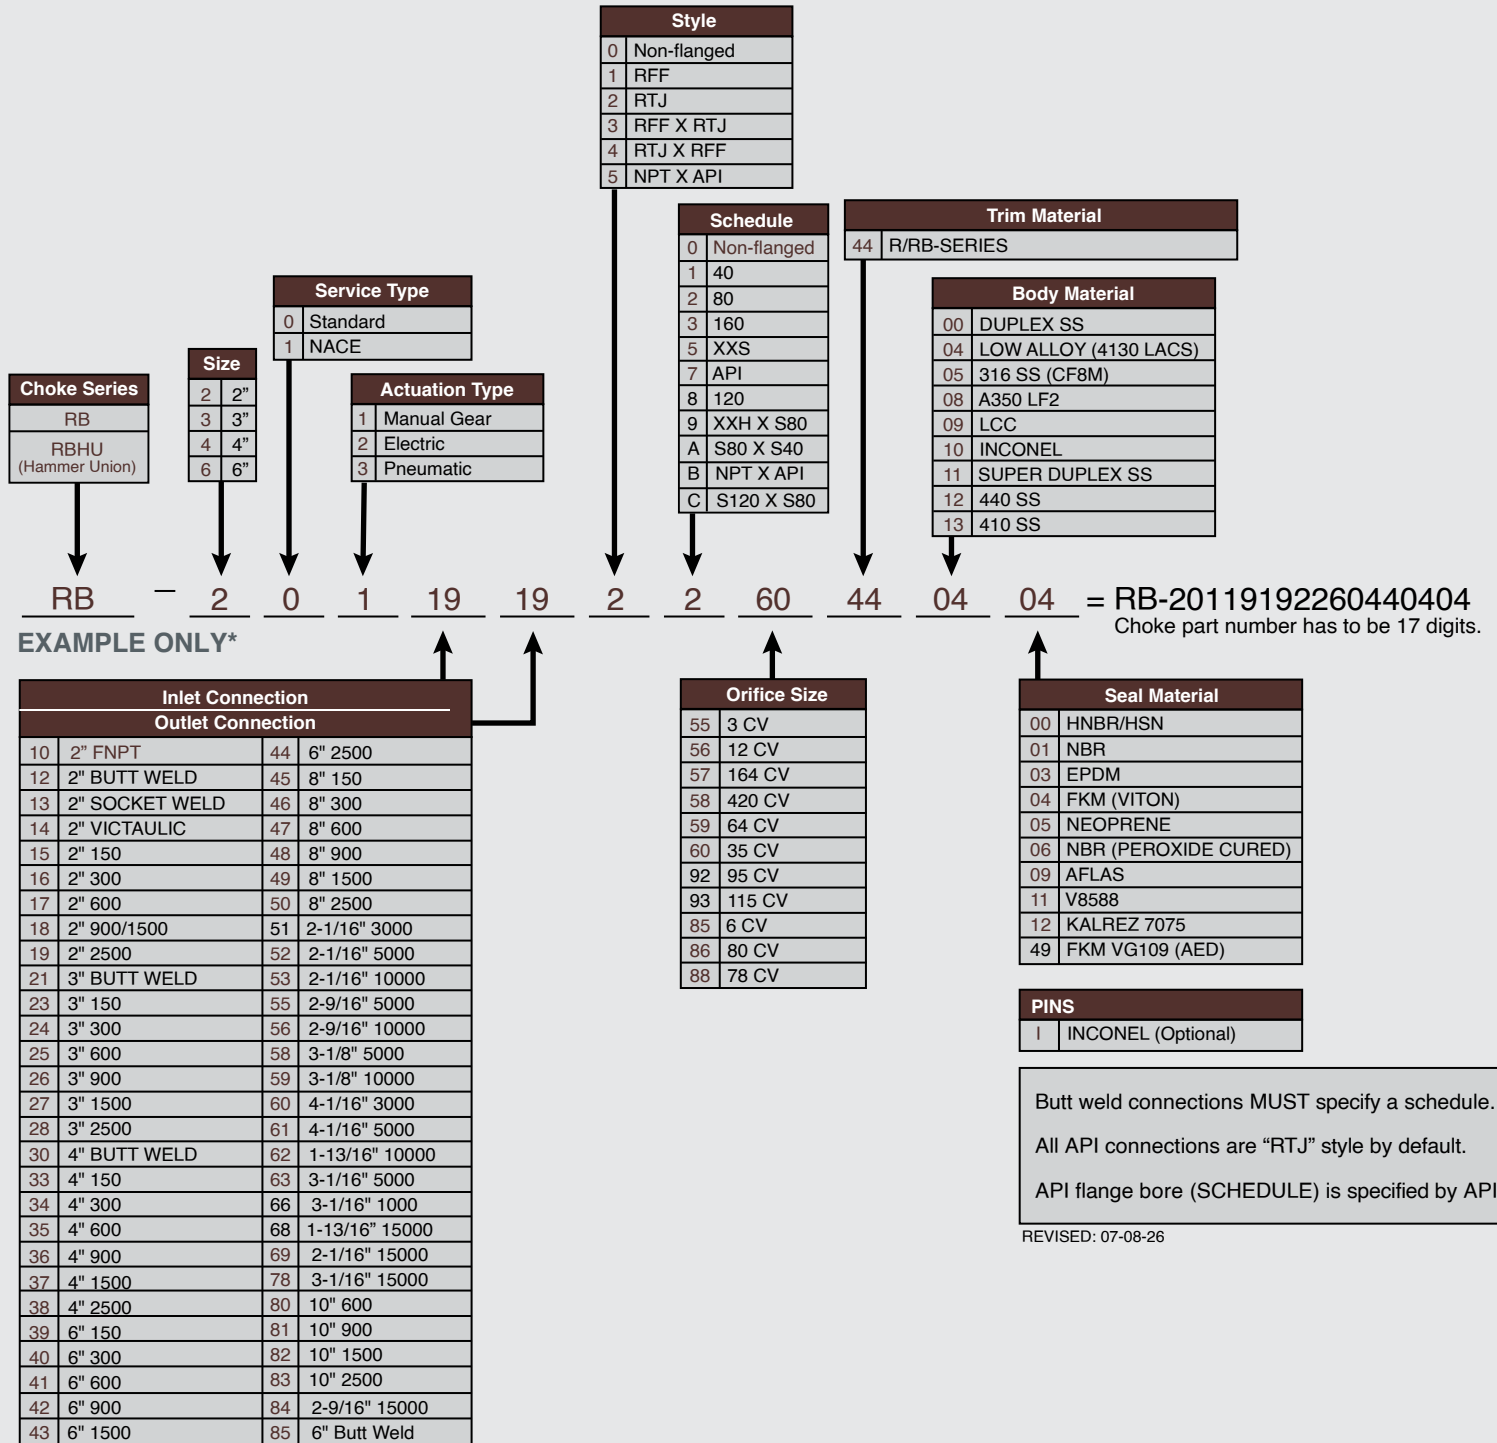

*For more options, contact Taylor Valve.

REVISED: 07-08-26

Butt weld connections MUST specify a schedule.
All API connections are "RTJ" style by default.
API flange bore (SCHEDULE) is specified by API.

7/08/2026



Taylor Valve Technology
8300 S.W. 8th Street
Oklahoma City, Oklahoma 73128

TEL 405.787.0145
FAX 800.805.3401

WEB www.taylorvalve.com
EMAIL info@taylorvalve.com